# This Page Is Inserted by IFW Operations and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents will not correct images, please do not report the images to the Image Problem Mailbox.



#### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5:

A61L 31/00, A61F 2/00

A1

(11) International Publication Number: WO 94/19029

(43) International Publication Date: 1 September 1994 (01.09.94)

(21) International Application Number:

PCT/US93/05775

(22) International Filing Date:

16 June 1993 (16.06.93)

(30) Priority Data:

08/019,394

18 February 1993 (18.02.93)

US

Published

PT, SE).

With international search report.

(81) Designated States: CA, DE, GB, JP, SE, European patent (AT,


BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL,

(71) Applicant: W.L. GORE & ASSOCIATES, INC. [US/US]; 551
Paper Mill Road, P.O. Box 9206, Newark, DE 19714 (US).

(72) Inventors: KRANZLER, Thanc, L.; 2650 N. Nelson Drive, Flagstaff, AZ 86001 (US). MCDONALD, Michael, L.; 6050 Townsend Winona Road, Flagstaff, AZ 86004 (US).

(74) Agents: SAMUELS, Gary, A. et al.; W.L. Gore & Associates, Inc., 551 Paper Mill Road, P.O. Box 9206, Newark, DE 19714 (US).

(54) Title: A LAMINATED PATCH TISSUE REPAIR SHEET MATERIAL

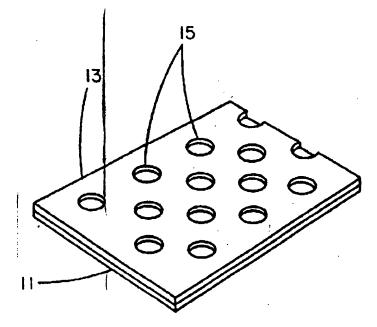

- Aract

t of implantable patch tissue repair material having the form of a layer of porous golytetrafluoroethylene sheet material laminated sh-type sheet material having a multiplicity of openings through the mesh-type sheet material, said openings having a mean ter of about 0.1 mm. The inventive patch tissue repair material offers good strength characteristics, good biocompatibility, at flexibility.

### FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

			1		
AT	Amstria	GB	United Kingdom	MOR	Mauritania
	Australia	GE	Georgia	MW	Majawi
AU		GN	Guinea	NE	Niger
58	Barbedon	GR	Greece	NL	Netherlands
BE	Belgium	HTO	Hongary	NO	Norway
BF	Burkins Fest	IE.	. (reland	NZ	New Zealand
BG	Bulgaria		•	PL	Poland
rj	Benin j	117	<u>lealy</u>	PT	Portugal
BR	Brazii	J.P	Japan	-	Romenia
BY	Belartts	KE	Kenya	RO	
CA	Ceneda	<b>⊈</b> G	Kyrgystan	RU	Russian Federation
Œ	Central African Republic	' KP	Democratic People's Republic	SD	Sudan
CG	Coago	1	of Koros	SE	Sweden
CH	Switzerland	KR	Republic of Korca	SI	Slovenia
a	Cite d'Ivoire	KZ <sup>i</sup>	Kazakhstan	SK	Slovakia
CM	Cameroon	Ц	Liechtenstein	SN	Scoogal
CN	China	LK	Sri Lagka	TD	Chad
		ננט	Luxembourg	TG	Togo
œ	Czechoslovskia	LŸ	Latvia	17.1	Tajikisten
Œ	Czech Republic	MC	Monaco	TT	Trinkind and Tobago
DE	Germany	. WD	Republic of Moldova	UA	Ulcraine
DK	Denmark	MG	Madagescer	US	United States of America
ES	Spein		Mali	UZ	Uzbekistan
FI	Figlend	MIL		VN	Vict Nem
FR	France	MEN	Mongolia	***	* Do 0 *****
GA	Gabon				

#### A Laminated Patch Tissue Repair Sheet Material

#### FIELD OF THE INVENTION

This invention relates to the field of implantable sheet

materials useful for the repair of living tissue and particularly for hernia repairs.

#### BACKGROUND OF THE INVENTION

Implantable sheet materials for tissue repair are well known. Tissue defects commonly repaired with these materials include wounds of the abdominal wall and in particular hernia repairs. Wounds of the chest wall, diaphragm and other weaknesses of the musculoaponeurotic tissues are also repaired with these materials.

There are two fundamental types of sheet materials that are most predominantly used. The first type is a mesh material having a multiplicity of openings through the material, such as Marlex® Mesh available from C. R. Bard, Inc., Billerica, MA. This is an open mesh knitted from polypropylene monofilament of about 0.17 mm diameter and having openings of about 0.54 mm diameter. These mesh materials offer good suture retention, good mechanical strength, and allow tissue to grow through the mesh openings.

An alternative type of implantable sheet material for tissue repair is GORE-TEX® Soft Tissue Patch made from porous expanded polytetrafluoroethylene, available from W. L. Gore & Associates, Inc., Flagstaff, AZ in 1.0 and 2.0 mm thicknesses. This is a porous sheet material that does not contain large, macroporous holes in the fashion of a mesh. Because there are no large holes for tissue to grow through and around, this material is useful when it is desirable to minimize the risk of tissue adhesion.

25

10

15

20

15

20

#### SUMMARY OF THE INVENTION

The present invention is a sheet of implantable patch tissue repair material comprising a layer of porous polytetrafluoroethylene sheet material laminated to a layer of mesh-type sheet material having a multiplicity of macroporous openings through the mesh-type sheet material, said openings having a mean minimum diameter of about 0.1 mm. The inventive patch tissue repair material offers good strength characteristics, good biocompatibility, suture retention, and flexibility.

The term laminated is used herein to describe the bonding together of two layers of material in any fashion that prevents subsequent separation of the layers during ordinary use. Macroporous openings are herein considered to be openings visible to the human eye without magnification, and visibly open through the thickness of the layer through which the openings have been formed. Microporous openings require the use of magnification to make them visible to the human eye.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 describes a perspective view of the laminated patch tissue repair sheet material of the present invention.

Figure 2 describes a cross section of the laminated patch tissue repair sheet material of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

repair sheet material of the present invention having a layer 11 of porous PTFE laminated to a layer 13 of mesh-type sheet material having a multiplicity of openings through the mesh-type sheet material. Figure 2 describes a cross section of the laminated patch tissue repair sheet material.

10

15

20

25

30

35

The openings through the mesh-type sheet material should be of at least about 0.1 mm diameter. The general shape of the opening is not believed to be of any biological importance and can therefore be round, elliptical, triangular, square, rectangular, hexagonal, etc. For non-circular openings having a length or long diameter and a width or short diameter, the term minimum diameter is defined herein as the maximum dimension, measured substantially parallel to the surface of the sheet material, that describes the width or short diameter of the non-circular opening. The minimum diameter is to be measured with the sample in a relaxed state with no deforming force. The mean minimum diameter is determined by randomly selecting a sample area containing at least 10 macroscopic openings, locating and measuring the minimum diameter of the ten largest openings within that area and calculating the mean diameter of those ten openings. If ht is not possible to obtain a sample containing at least ten openings, then all openings within the area of the dargest sample obtainable should be included in the calculation of the mean value.

The layer 13 of the mesh-type sheet material may be any suitable biocompatible material including polypropylene, polyethylene terephthalate, PTFE or microporous PTFE. The mesh-type sheet material may be in the form of aisheet from which the openings 15 have been cut or otherwise formed, or alternatively may be an open fabric such as a knit or a weave having a multiplicity of openings formed by widely spaced strands of the fabric.

The layer 11 of microporous PTFE is preferably microporous expanded PTFE made according to the teachings of U. S. Patents 3,953,556 and 4,187,390. This material has a microstructure of nodes interconnected by fibrils. It may also be made according to U.S. Patents 4,482,516 and 4,598,011 if a high strength material with a coarse microstructure is desired. Layer 11 may optionally be made as a laminate of multiple layers as taught by U.S. Patents 4,385,093 and 4,478,665.

Layers 11 and 13 may be laminated by at least two different methods. First, adhesives may be used to adhere the two layers. One such suitable adhesive is Silastic® Medical Adhesive Silicone Type A (Catalog no. 891) from Dow Corning, Midland, MI. A thermoplastic

10

15

20

25

30

adhesive such as Teflon FEP 120 Aqueous Dispersion from E. I. DuPont de Nemours, Wilmington, DE may be used. A coating of the FEP dispersion is applied to the side of the mesh-type layer 13 which is intended to be adhered to the porous PTFE layer 11. The two layers are then adhered by the application of heat and pressure (as for example applied by opposing rollers) with enough heat applied to cause melting of the Teflon FEP 120 Dispersion, about 290°C.

Alternatively, layers 11 and 13 may be laminated by the use of heat and pressure without the use of an additional adhesive. This has been found to be the preferred method when the mesh-type layer 13 of a material having a lower melting point than that of the porous PTFE layer 11. For example, when a layer 13 of mesh-type polypropylene is used, it was found that heating the polypropylene layer to about 180°C, which is in excess of the melting point of polypropylene, while simultaneously applying pressure in a direction perpendicular to the planes of layers 11 and 13 resulted in good adhesion between the two layers.

It was also found possible to form both layers 11 and 13 from porous expanded PTFE sheet materials. A sheet of 1 mm thick GORE-TEX Soft Tissue Patch material of about 6 cm x 6 cm, was used for the mesh layer 13 by forming holes 15 through the layer 13 by using a round punch of about 3 mm diameter. The holes were spaced about 1.2 cm apart. Layer 13 was then laminated with the use of heat and pressure to a second layer 11 of GORE-TEX Soft Tissue Patch material wherein layer 11 contained no holes. Lamination was accomplished by placing layers I1 and 13 between two plates heated to 380°C and applying about 1.3 kg/cm² pressure to the two layers. The heated plates were allowed to cool to about 300°C while the pressure was maintained. At the end of this time the pressure was released and the two laminated layers 11 and 13 were found to be well adhered in that repeated flexing of the laminated layers showed no inclination of the layers to separate.

10

15

#### We Claim:

- 1. A sheet of implantable patch tissue repair material comprising a layer of porous polytetrafluoroethylene sheet material laminated to a layer of mesh-type sheet material having a multiplicity of openings through the mesh-type sheet material, said openings having a mean minimum diameter of about 0.1 mm.
- 2. A sheet of implantable patch tissue repair material according to claim 1 having a mean minimum diameter of about 0.2 mm.
- 3. A sheet of implantable patch tissue repair material according to claim 1 having a mean minimum diameter of about 0.4 mm.
- 4. A sheet of implantable patch tissue repair material according to claim 1 having a mean minimum diameter of about 0.6 mm.
- 5. A sheet of implantable patch tissue repair material according to claim 1 wherein the mesh-type sheet material is comprised of polypropylene.
- 6. A sheet of implantable patch tissue repair material according to claim 1 wherein the mesh-type sheet material is comprised of polyethylene terephthalate.
- 7. A sheet of implantable patch tissue repair material according to claim 1 wherein the mesh-type sheet material is comprised of polytetrafluoroethylene.
  - 8. A sheet of implantable patch tissue repair material according to claim 7 wherein the polytetrafluoroettylene is porous polytetrafluoroethylene.
- 25 9. A sheet of implantable patch tissue repair material according to claim 1 wherein the layer of porous pelytetrafluoroethylene comprises porous expanded polytetrafluoroethylene having a microstructure of nodes interconnected by fibrils.
- 10. A sheet of implantable patch tissue r pair material according to claim 9 wherein the mesh-type sheet material is comprised of polypropylene.
  - 11. A sheet of implantable patch tissue repair material according to claim 9 wherein the mesh-type sheet material is comprised of polytetrafluoroethylene.
- 35 12. A sheet of implantable patch tissue repair material according to claim 9 wherein the mesh-type sheet material is comprised of polyethylene terephthalate.

PCT/US93/05775

- 13. A sheet of implantable patch tissue repair material according to claim 11 wherein the polytetrafluoroethylene is porous polytetrafluoroethylene.
- 14. A sheet of implantable patch tissue repair material according to claim 1 wherein the layer of porous polytetrafluoroethylene is laminated to the layer of mesh-type sheet material by an adhesive.
  - 15. A sheet of implantable patch tissue repair material according to claim 14 wherein the adhesive is silicone adhesive.
- 10 16. A sheet of implantable patch tissue repair material according to claim 14 wherein the adhesive is a fluoropolymer adhesive.
  - 17. A sheet of implantable patch tissue repair material according to claim 14 wherein the adhesive is a fluorinated ethylene propylene adhesive.
- 15 18. A sheet of implantable patch tissue repair material according to claim 14 wherein the adhesive is a thermoplastic adhesive.
  - 19. A sheet of implantable patch tissue repair material according to claim 1 wherein the layer of porous polytetrafluoroethylene is laminated to the layer of mesh-type sheet material by thermal bonding.

20


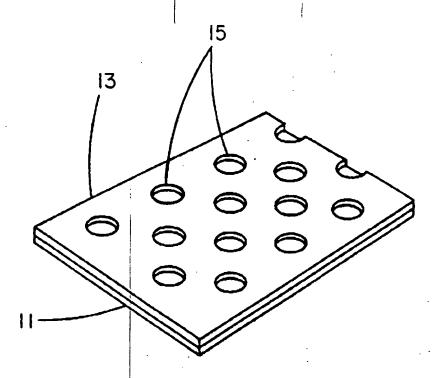


FIG. 1

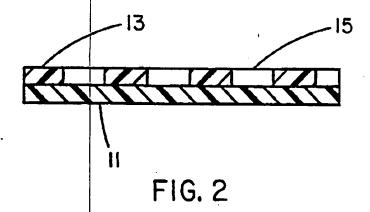

It ternational Application No

	CATION OF CUIP IE	CT MATTER (if severe	I destification sum	hols anniv indicate all)6									
		Classification (IPC) or to											
	5 A61L31/0												
1110.61.	J 701521/0	, , , , , , , , , , , , , , , , , , , ,	_, 00		1								
			<del>, ,</del>										
n. FIELDS S	I. FIELDS SEARCHED												
Minimum Documentation Searched													
Classification	Assification System Classification Symbols												
_	_	4631	1615										
Int.C1.	5	A61L ;	A61F										
		Documentation	Searched other th	an Minimum Documentation	i								
to the Extent that such Documents are locluded in the Fields Searched													
				•									
					1								
III DOGU	ENTS CONSIDERE	D TO BE RELEVANT											
			where andropriate	s, of the relevant passages 12	Relevant to Claim No.13								
Category a	CALLEGE OF DA	nominal som transmission											
	NO F O	210 219 (CODE)		•	1								
٨	WU,A,9 a 25 June	210 218 (GORE) 1992			. 1								
•	25 June	1336											
A	IIS . A . 3	124 136 (USHER	F.C.)										
<b>'</b>	10 Marc	h 1964											
				•	1								
		•											
	•			·									
				i									
				<b>)</b>	1								
1													
1													
<b>!</b>					ī								
1 [													
<u>i</u>			+	"T" later document published after the later	etional filling data								
* Special	categories of cited d	ecuperts : W	\ <b>\.</b>	or whoster data and not in conflict with	(he application max								
C00	sidered to be of parts	cacal state of the art which calls relovance		cited to understand the principle or then									
"E" earl	Her document but pel	dished on or after the inte	pstional	"X" document of particular relevance; the ci	zimel invention								
	ng date ument which may thr	ow counts on priority claim is the publication date of a	(s) or	involve an inventive step									
white city	ch is cited to establis tion or other special	h the publication date of a reason (as specified)	nother	"Y" document of particular relevance; the ci	DUAS REED ADED FOR								
"O" doc	cucuent referring to a	n are disclosure, use, exhi	hition or	document is combined with one or more ments, such combination being obvious	e other such EDGI-								
"P" 400	er cuesus sument aublished prie	r to the international filing	date but	in the art.									
lacto	er than the priority d	ite chimel		"A" document member of the same patent f	anu y								
IV. CERTI	FICATION		T										
<b>1</b> -		the International Search		Date of Mailing of this International Se	earch Report								
		OBER 1993		2, 10 93									
1	13 001												
Internations	d Searching Authorit	7		Signature of Authorized Officer									
	EUR P	EAN PATENT OFFIC	Ε	PELTRE CHR.									
			1										

## ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO.

US 9305775 SA 76383

This annex firsts the patent family members relating to the patent documents cited in the above-mentioned international search report.

The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

15/10/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9210218	25-06-92	EP-A- 0560934	22-09-93
US-A-3124136		None	a
		1	
		· •	
		<b>(</b>	ļ
			·
		<b>\</b>	
,			<b>\</b>
		•	
		,	\
	1	:	}
İ	t	1	1
ı			
1	,		
			Į.
I I			•
		propent Patent Office, No. 12/82	